

WPIR & WPIR-CRT

12m Wireless Motion Detectors



Overview:

Vanderbilt's WPIR and WPIR-CRT seamlessly blend style and security resulting in a class leading product. These devices have a detection range of 12 metres and can be configured for use in any environment, establishing the highest security protection. The devices are easy to mount, easy to pair, and easy to configure, ensuring installation time is minimized. In addition, both devices use enhanced, low current RF technology that provides superior communication and ensures long battery life.



Class leading security protection:

	12m detection coverage
	Adjustable settings for installation in any environment
	EN Grade 2 approved
	PET immunity up to 25kg (WPIR)



WPIR & WPIR-CRT

12m Wireless Motion Detectors

Superior RF and battery performance:



Long battery life

With high performance Lithium batteries and APS (Automatic Power Save) technology the WPIR and WPIR-CRT detectors have a battery life of 5 years.



Long RF range

500m open air range means that a single transceiver can cover the majority of installations.

Quick installation and configuration:



Easy to mount

The WPIR device supports both corner and flat mounting with full tamper support. The WPIR-CRT device can also be mounted using a bracket for optimum placement or using high performance adhesive for quick installation.



Easy to pair

Smart Pairing mechanism allows the device to pair with the SPC transceiver in seconds.

Key features include:

- ✓ Automatic pairing on battery insertion
- ✓ LED guided Enrolment
- ✓ LED guided Walktest



Easy to configure

The WPIR and WPIR-CRT devices are entirely firmware configurable 'over-the-air' and contain no mechanical dip switches.


Configurable features include:

- ✓ Sensitivity
- ✓ PET Immunity WPIR
- ✓ Supervision time
- ✓ LED behaviour

Detection Capabilities:


WPIR:

- Quad Element PIR
- 90° viewing angle

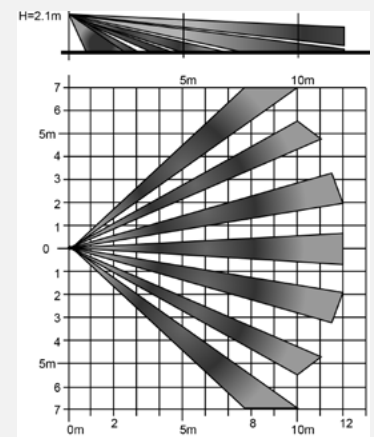

WPIR-CRT:

- Pyro Element with Mirror Optics
- 6° viewing angle

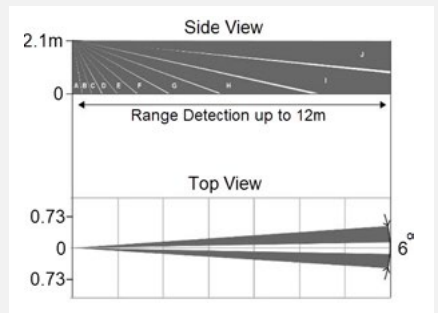







WPIR & WPIR-CRT





12m Wireless Motion Detectors

	Frequency Band	868-869MHz
---	----------------	------------

Battery / Power:

	Battery Type	LLithium 3V battery type GP CR123
	Battery Life	5 years
	Range in open space	> 500 m
	Current Draw	Standby ~11 μ A Receive mode ~24 mA Transmit mode ~45 mA
	Transmit power	~ 14dBm
	Automatic Power Saving (APS)	Yes

Intrusion Detection Properties:






	Detection coverage	12m
	Tamper Switch	Front cover removal & Back tamper
	Supervision Time	7 min by default (programmable between 1 to 30 min)
	Event Transmission	Alarm, Tamper, Supervision, Low Battery
	PET Immunity	25Kg (WPIR only)



WPIR & WPIR-CRT

12m Wireless Motion Detectors

Mounting specifications:

	Operating Temperature	-10°C to +50°C
	Optimal installation height	1.8m to 2.4m
	Dimensions	WPIR: 108mm x 58mm x 42.5mm WPIR-CRT: 103mm x 31.5mm x 34.5mm
	Weight (Inc. battery)	WPIR: 135 gr WPIR-CRT: 66gr
	LED Indications	Red LED: PIR Activated Green LED: Walktest

Ordering Information:

Type	Art. No	Description
WPIR	V54538-F109-A100	Wireless 12m PIR detector PET
WPIR-CRT	V54538-F110-A100	Wireless curtain PIR detector



VANDERBILT


vanderbiltindustries.com

 @VanderbiltInd

 Vanderbilt Industries

Vanderbilt International Ltd.

Clonshaugh Business and Technology Park
Clonshaugh, Dublin D17 KV 84, Ireland

 +353 1 437 2560